


## KIEV 38W 3000K 2400LM 40° 220V D158MM

**Code: KI38-C**

The downlights spread general or accent light, keeping high luminous efficiency. The low luminance is combined with extremely low glare levels, thanks to the recessed optics and a wide range of accessories. You can choose among many versions: with round or square bezel, with a fixed or tiltable optic, trimless or with low recessed height. In the swivel version, they allow an additional level of versatility that adapts to any environment and allows you to create targeted lighting.

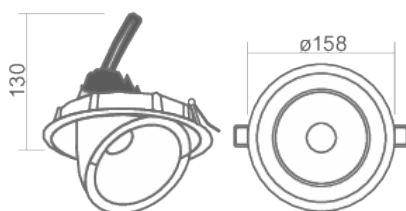

### General specifications

Designer	Elcom Design Team
Installation environment	Interior
Native mounting type	Rebated flush-mounted
Mounting type	Rebated flush-mounted
Ideal application locations	Residential, Hospitality, Showroom, Museum, Office, Commercial space
Packaging	Box
Made in	Italy

### Physical specifications

Shape	Round
Body material	Aluminum
Body finish	Matte
Body color	White
Frontal material	Aluminum
Frontal finish	Matte
Frontal color	White
Thermal dissipation	Passive
Covering with insulating materials	No
IP	IP20
Waterstop	No

Salt mist resistance	No
----------------------	----

## Lighting specifications

Lumen	2400
Nominal Lumen	1850
Power	38
W source	38
Light type	White
CCT	3000K
CRI	90
UGR	< 19
Life time	L70B50

## Optical specifications

Light beam distribution	Symmetric
Beam	40
Optics type	Symmetrical optical lens
Optical diffuser finish	Transparent
Orientability	Oscillating

## Electrical specifications

Power supply availability	Included
Power supply position	Remote
Dimmable	No
Dimming type	ON/OFF
Power supply type	Current
Input Voltage (V)	230

## Dimensions and weight

Height / Thickness (mm)	130
Diameter (mm)	158
Recessed hole width (mm)	140

## General conditions

Warranty	2 years
----------	---------