


KIEV 40W 3000K 2960LM 40° 220V D188MM

Code: KI40-C

The downlights spread general or accent light, keeping high luminous efficiency. The low luminance is combined with extremely low glare levels, thanks to the recessed optics and a wide range of accessories. You can choose among many versions: with round or square bezel, with a fixed or tiltable optic, trimless or with low recessed height. In the swivel version, they allow an additional level of versatility that adapts to any environment and allows you to create targeted lighting.

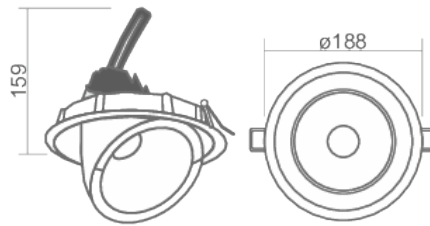

General specifications

Designer	Elcom Design Team
Installation environment	Interior
Native mounting type	Rebated flush-mounted
Mounting location	Ceiling
Packaging	Box
Made in	Italy

Physical specifications

Body material	Aluminum
Body finish	Matte
Body color	White
Orientability	Oscillating
Suitable for insulating materials	No
IP	IP20
Waterstop	No
Salt mist resistance	No

Lighting specifications

Lumen	2960
Light type	White

CCT	3000K
CRI	90
UGR	< 19
Life time	L70B50

Light Emission Specifications

Light beam distribution	Symmetric
Optics / diffuser / reflector type	Symmetrical optical lens
Optical finish / diffuser / reflector	Transparent
Beam (°)	40

Electrical specifications

Power supply availability	Included
Power supply position	Remote
Dimmable	No
Control type	ON/OFF
Power (W)	40
Power supply type (CC / CV)	Current
Input Voltage MIN-MAX (V)	230

Dimensions and weight

Height / Thickness (mm)	159
Diameter (mm)	188
Recessed hole width (mm)	172

General conditions

Warranty	2 years
----------	---------

Accessory codes



AL00080
DRIVER 350-1050mA 40W DALI-PUSH IP20



03230
DRIVER 350-1050mA 40W 1..10V IP20