



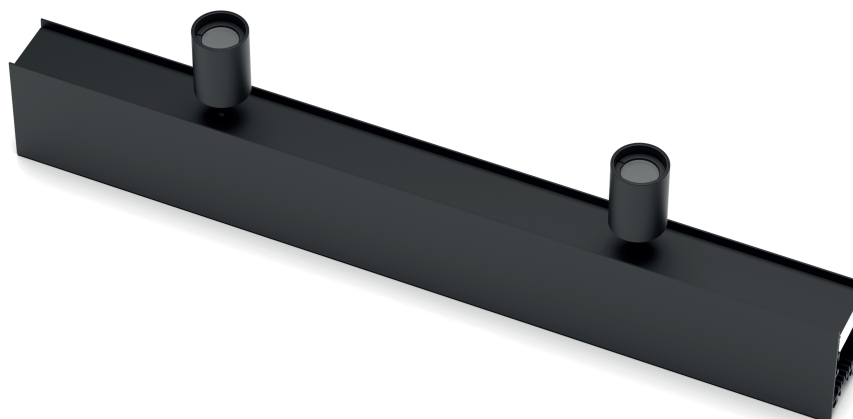

LIGHTING DATA

Watt	lm ¹	lm/W	CRI
7,5	656	87	90

¹ Product real lumen based on CCT at 4000K

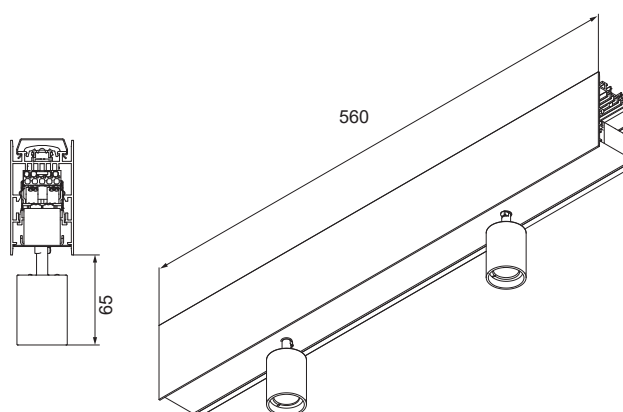

CODE / Complete the code + (1) + (2) + (3) + (4)

LKF2-

(1) Beam

X 14°
S 21°
M 38°
L 52°

(2) Installation

P Ceiling
S Suspension


(3) CCT

27 2700K
30 3000K
40 4000K


(4) Colour

BB white/white
NN black/black


(1) EMISSION

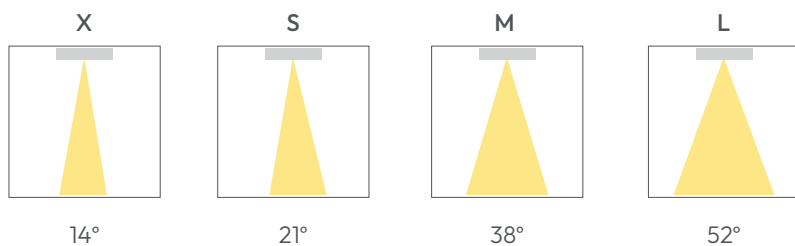

(2) INSTALLATION

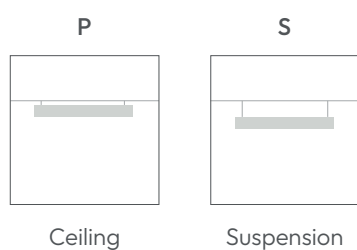

(3) CCT



(4) COLOUR



Physical Specifications

Mounting type	As specified
Body material	Aluminium
Body finish	Powder-coated
Optic material	PMMA
IP	IP20

Electrical Specifications

Input voltage (AC)	220...240V
Input voltage (DC)	180...264V
Power (W)	As specified
Driver	Included, integrated into the fixture
Dimming	As specified
Insulation class	I
Power cable	Not included

Lighting Specifications

Emission type	Mono
CCT	As specified
Luminous flux (lm)	As specified
CRI	>90
Beam	As specified
Luminaire efficiency (lm/W)	As specified

Dimensions

Length (mm)	560
Width (mm)	45
Height/Thickness (mm):	147